PRODUCT DATA SHEET

HOSPITAL PRODUCTS



SAFETOUCH™ CATH WINGED WITH INJECTION PORT

STERILE, SINGLE-USE CATHETER WITH SAFETY DEVICE FOR IV INFUSION

NIPRO

SAFETOUCH™ CATH WINGED WITH INJECTION PORT

STERILE, SINGLE-USE CATHETER WITH SAFETY DEVICE FOR IV INFUSION

- Irreversible, passive safety mechanism
- Audible click confirms locking of safety device
- Does not require a change in puncture technique
- Radiopaque
- Ultra sharp three-beveled needle to minimize discomfort
- Siliconization of needle minimizes penetration and gliding force
- Injection port with universal luer fitting
- Flexible wings for easy grip
- Color-coded wings and hub to indicate gauge
- Transparent PUR catheter tube for quick visualization of blood in the flashback chamber to facilitate insertion
- Flashback in hub means the needle is correctly in the vein
- Flashback in catheter means the catheter is correctly in the vein
- Latex-free, DEHP-free, PVC-free
- Available in 14-24 G
- IV infusion duration: hours to several days
- For use by healthcare professionals only

CE 0123
Class IIa Medical Devices
Rule 7
MDD 93/42/ECC
UMDNS 18331

PRODUCT COMPLIANCE

- CE-marked, Class IIa Medical Devices, Rule 7, MDD 93/42/EEC, UMDNS 18331
- Complies with the following norms, directives, and regulations:
  - ISO 594-1:1986
  - ISO 594-2:1998
  - ISO 2859-1:1999 /AMD 2011
  - ISO 7864:1993
  - ISO 10555-5: 2013
  - ISO 10993-10:2010
  - ISO 14644-4:2001
  - ISO 23908:2011
- Labels contain 26 languages

MANUFACTURING DETAILS

Legal manufacturer: Nipro Corporation

Country of origin: Thailand

STERILIZATION AND SHELF LIFE

Sterilization	Single-use only	Indicator sticker	Shelf life
EtO (Ethylene oxide) STERILE EO		Each outer box (or shipping carton) contains a chemical indicator that indicates sterility. This indicator comes in the form of a [violet] sticker that turns [blue] when sterilized.	5 years

MATERIALS USED

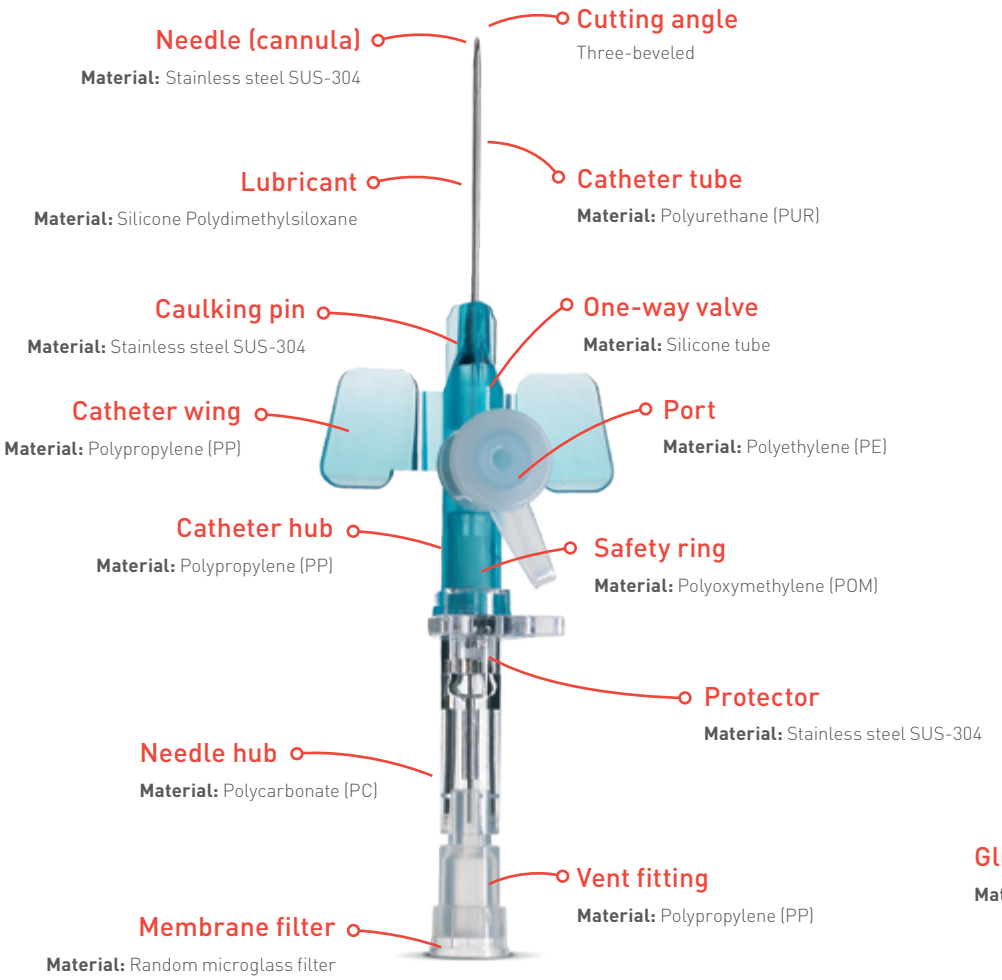

DEHP-free
Latex-free
PVC-free

Glue
Material: Acrylic resin

PRODUCT RANGE OVERVIEW

Reference code	Description	Purpose	Color	Flow rate not less than
NIC-SF 1450PWP- ET	IV Cath SF 14Gx2" (2,1x50mm) PUR	IV		Reference
NIC-SF 1650P WP-ET	IV Cath SF 16Gx2" (1,7x50mm) PUR	IV		⩾ 162 ml/min
NIC-SF 1832PWP-ET	IV Cath SF 18Gx1 1/4" (1,3x32mm) PUR	IV		⩾ 81 ml/min
NIC-SF 1850PWP-ET	IV Cath SF 18Gx2" (1,3x50mm) PUR	IV		⩾ 81 ml/min
NIC-SF 2032PWP-ET	IV Cath SF 20Gx1 1/4" (1,1x32mm) PUR	IV		⩾ 49 ml/min
NIC-SF 2050PWP-ET	IV Cath SF 20Gx2" (1,1x50mm) PUR	IV		⩾ 49 ml/min
NIC-SF 2225PWP-ET	IV Cath SF 22Gx1" (0,8x25mm) PUR	IV		⩾ 29 ml/min
NIC-SF 2232PWP-ET	IV Cath SF 22Gx1 1/4" (0,8x32mm) PUR	IV		⩾ 29 ml/min
NIC-SF 2419PWP-ET	IV Cath SF 24Gx3/4" (0,7x19mm) PUR	IV		⩾ 17 ml/min
NIC-SF 2425PWP-ET	IV Cath SF 24Gx1" (0,7x25mm) PUR	IV		⩾ 17 ml/min

IV: Intravenous, SC: Subcutaneous, SF: SafeTouch, E: Ethylene Oxide, T: Thailand

PACKAGING DETAILS

Reference code	Gauge	Length	Inner box					Outer box					
	(G)	(mm)	Quantity	L (mm)	W (mm)	H (mm)	Weight (g)	Quantity	L (cm)	W (cm)	H (cm)	Weight (kg)	m³
NIC-SF-xxxxPWP-ET	xx	xx	50	160	100	157,5	6,740	2000	1024	342	349	11,840	0,1222

Languages

26 languages on IFU and all levels of packaging:

English (EN), Bulgarian (BG), Czech (CS), Danish (DA), German (DE), Greek (EL), Spanish (ES), Estonian (ET), Finnish (FI), French (FR), Croatian (HR), Hungarian (HU), Italian (IT), Lithuanian (LT), Latvian (LV), Dutch (NL), Norwegian (NO), Polish (PL), Portuguese (PT), Romanian (RO), Russian (RU), Slovakian (SK), Slovenian (SL), Serbian (SR), Swedish (SV), Turkish (TR)

Transport conditions

Closed and dry

Storage conditions

Open the packaging only immediately before use to guarantee sterility.

Label details

	Individual unit	Inner box	Outer box
Product name	✓	✓	✓
Product size	✓	✓	✓
Quantity (pieces)	—	✓	✓
REF	✓	—	—
LOT	✓	—	—
	✓	—	—
STERILE EO	✓	✓	✓
CE	✓	✓	✓

	Individual unit	Inner box	Outer box
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
	✓	✓	✓
EC REP	✓	✓	✓
	—	✓	✓
	✓	✓	✓

Datasheet-SAFETOUCH_Cath - Winged with injection port - THA - 27 Nov2019